IPMECD-0162-M2745

Barrier Rod

- 2.7 to 4.5 m telescopic arm that can be used on either side of the boom gate.
- Made of aluminum alloy, and designed with an anti-rust case that was treated with electrostatic spray.
- The main pole has an elastic anti-smashing rubber strip at the bottom, while the auxiliary pole does not.

Series Overview

Constructed from highly durable aluminum alloy, the Barrier Rod features an advanced anti-rust coating on its surface. Additionally, it is equipped with an elastic anti-collision rubber strip at the bottom for added protection.

Technical Specification

Basic

Color	Red and white
Matched Product	DHI-IPMECD-1062 Series Barrier

General

Operating Temperature	–30 °C to +65 °C (–22 °F to +149 °F)
Storage Temperature	–30 °C to +65 °C (–22 °F to +149 °F)
Operating Humidity	10%–90% (RH), non-condensing
Storage Humidity	10%–90% (RH), non-condensing
Casing Material	Metal (Aluminum)
Product Dimensions	2,510.0 mm × 95.0 mm × 45.0 mm (98.82" × 3.74" × 1.77") (L × W × H)
Packaging Dimensions	2,610.0 mm × 130.0 mm × 100.0 mm (102.76" × 5.12" × 3.94") (L × W × H)
Net Weight	4.1 kg (9.04 lb)
Gross Weight	4.5 kg (9.92 lb)
Installation	Compatible with barrier installation
Anti-corrosion Level	Basic Protection

Ordering Information

Type	Model	Description
Barrier Rod	IPMECD-0162-M2745	Barrier Rod
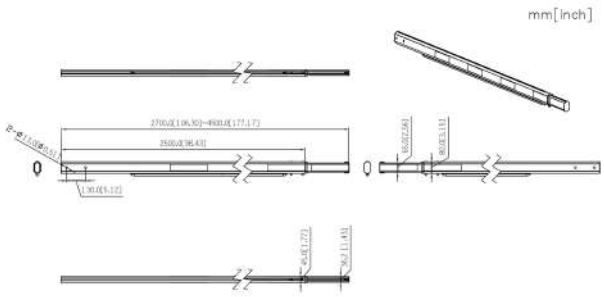
Dimensions (mm[inch])