




MEARI


Indoor PTZ
Smart Wi-Fi Camera

S1 Plus

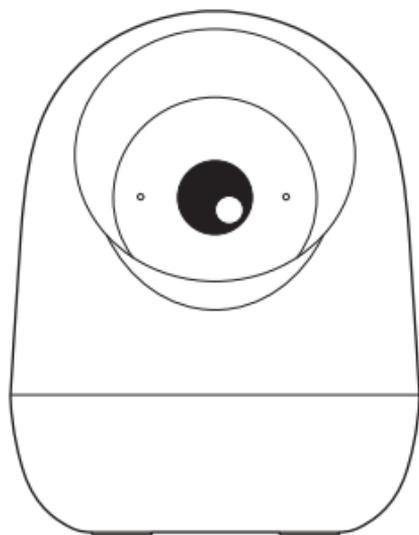

Quick Start Guide

Description

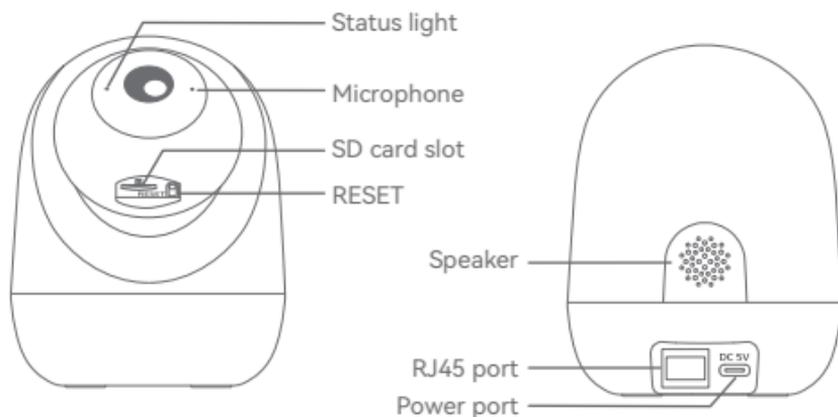

Name	Description
Power supply	DC 5V/1A
Status light	<ul style="list-style-type: none">● Solid red: Network malfunction● Fast blinking red: Waiting for network connection● Solid blue: Functioning properly● Fast blinking blue: Connecting
SD card slot	SD card storage (up to 256GB)
RESET	Press and hold for 5 seconds to reset the device (all settings will be restored to factory defaults)
RJ45 Port	Port for wired network. If the device is installed in a place without wireless network, such as basement, the device supports connecting to the network via network cable. Please make sure the length of the network cable can be connected to the router or repeater.

Tech Specs

Model: S1 Plus	
Resolution	2304(H) x 1296(V)
Angle of view	85°/45°/95°
Pan/Tilt	Pan: 0°~350°, tilt: 50°~-45°
IR Distance	Up to 10 m (32.8 ft)
Working temp	-20°C to 50°C
Local storage	SD card (up to 256GB)
Input power	DC 5V / 1A
Consumption	Up to 4.5W
Supported phone OS	iOS 9 / Android 5.0 or later
2.4GHz Wi-Fi	2412-2472MHz (Max. power<20dBm) (For CE) 2412-2462MHz (Max. power<30dBm) (For FCC)
5GHz Wi-Fi	5150-5725MHz (Max. power<23dBm) (For CE) 5725-5850MHz (Max. power<14dBm) 5150-5850MHz (Max. power<23dBm) (For FCC)
Network Interface	RJ45