MEARI

Smart 4G AOV Battery Camera

V1

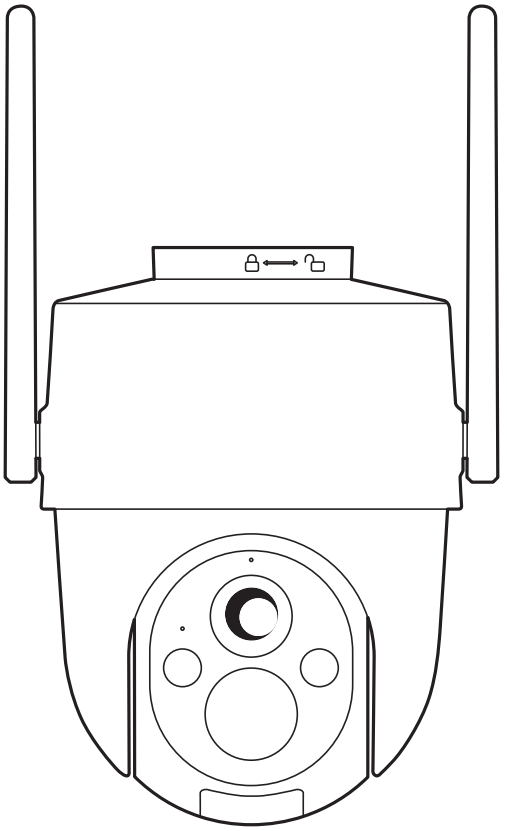

Quick Start Guide

Description

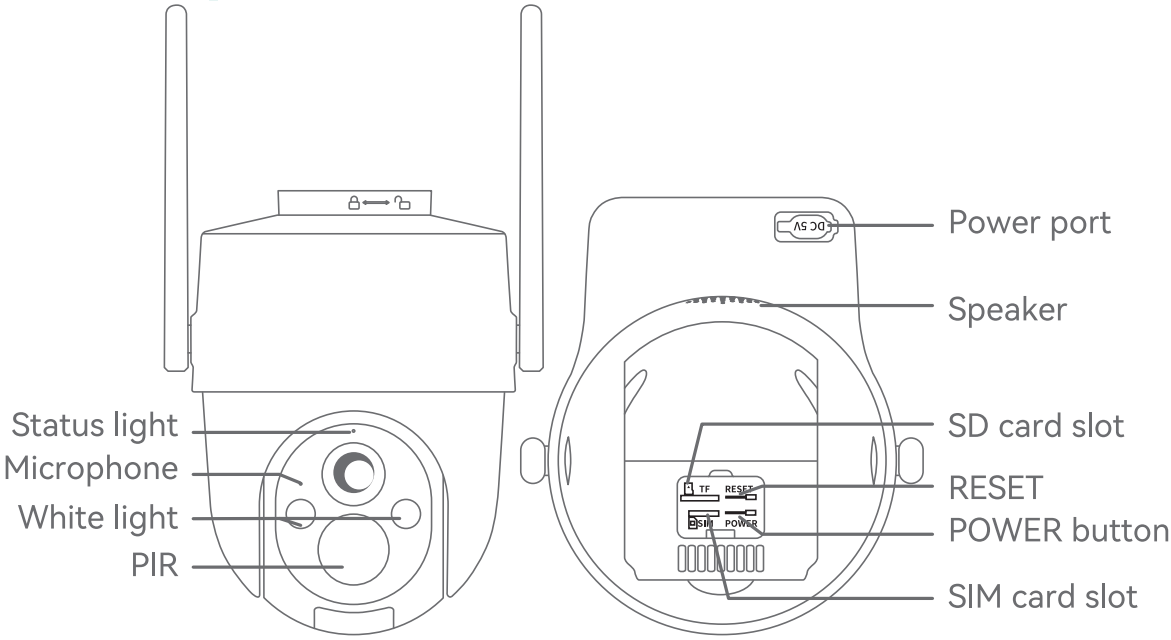

Name	Description
Power supply	DC 5V/2A
POWER button	Press the button for 3 seconds to turn on/off the camera
Status light	Blinking red slowly: Starting up; waiting for 4G connection Blinking red fast: Connecting to 4G network. If the red light flashes fast for a long time, try to reinsert the Nano SIM card or reset the camera Blinking blue: Waiting for adding to the App Solid blue: Camera has been successfully added to the App; in preview Blinking red and blue alternately: Unable to connect to the network. Please check whether the SIM card is installed correctly, and confirm whether the SIM card has 4G mobile data
SD card slot	SD card storage (up to 512GB)
RESET	Press and hold for 5 seconds to reset the device (all settings will be restored to factory defaults)

Tech Specs

Model: V1	
Resolution	2304(H) x 1296(V)
Field of view	90°/50°/110°
Pan/Tilt	Pan:0°~350°, Tilt:0~90°
Night visibility	Up to 30 m (98.4 ft)
Working temp	-20°C to 50°C
Local storage	SD card (up to 512GB)
Input power	DC 5V / 2A
Consumption	Up to 4.5W
Capacity	10400mAh rechargeable Li battery
Supported phone OS	iOS 9 / Android 5.0 or later
Bluetooth	2400-2483.5MHz (Max. power<20dBm)
LTE-FDD	LTE Band 1/3/7/8/20/28 (Max. power<25dBm) (For CE) LTE Band 2/4/5/12/13/66 (Max. power<25dBm) (For FCC)